

Go Human Kit of Parts

Photos, Transportation, and Delivery Logistics

www.scag.ca.gov




Treatments


The Kit includes materials that allow for 5 different street treatments that, when combined, create a temporary Complete Street demonstration on an otherwise typical street. The treatment options include the following:

1. Parklet
2. Curb Extension
3. Artistic Crosswalk
4. Separated Bike Lane
5. Median Refuge Island

Parklet

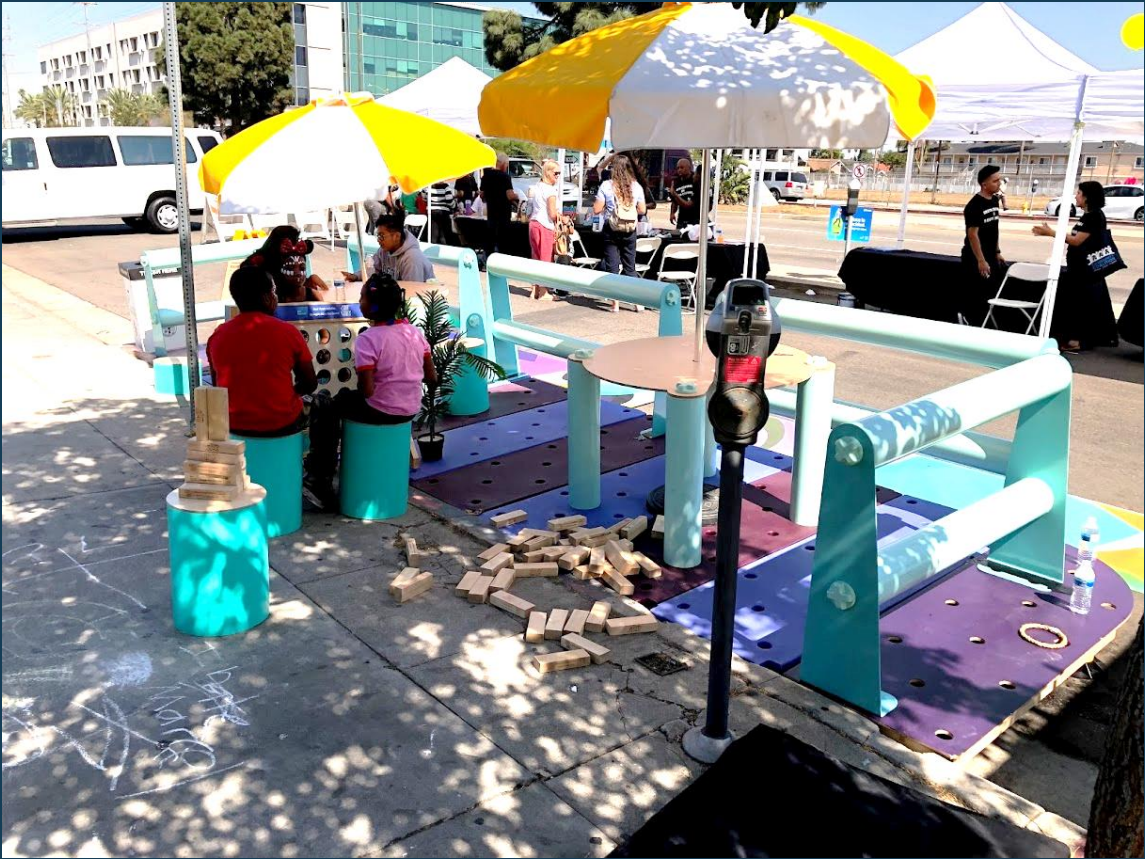

Curb Extension

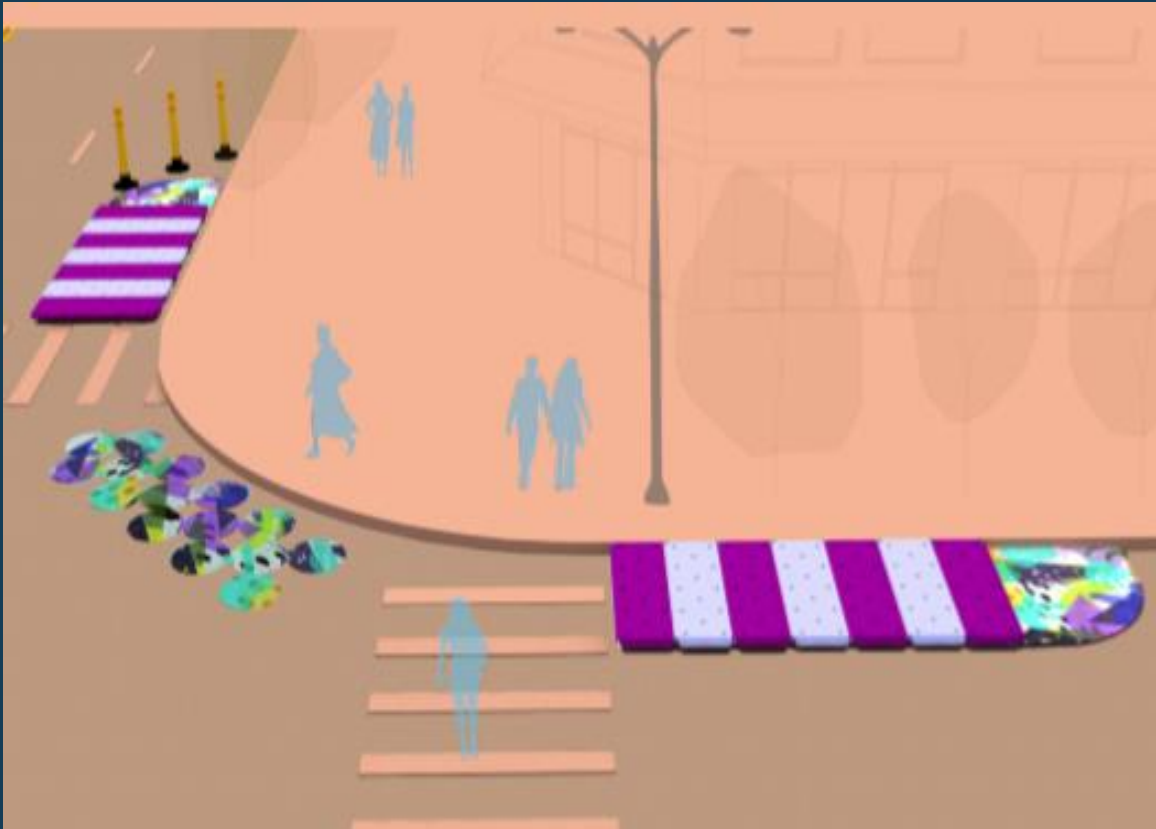

Artistic Crosswalk



Separated Bike Lane



Median Refuge Island



Each treatment includes an educational sign that describes the treatment in Spanish and English.


The Kit includes 5 signs in total.

PARKLETS

are tiny street plazas that extend the sidewalk and create more space to eat, relax and hang out.


MINIPARQUES

son pequeñas plazas en la calle que extienden la acera y crean más espacio para comer, relajarse y pasar el rato.

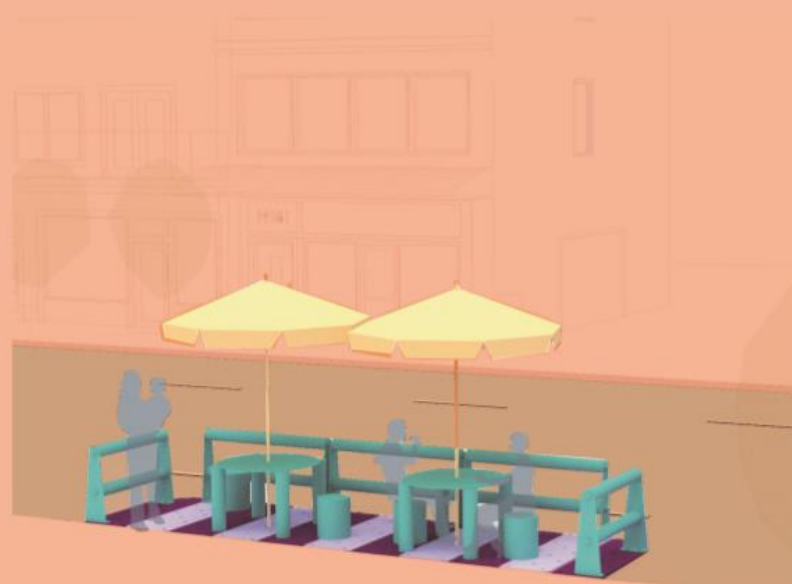

Complete Kit Access Details: Transport & Delivery

- Complete Kit is stored in a 7.75' x 7.5' x 16' long container (footprint of approx. 2 parking spaces)
- Allow enough space for storage unit door to open and to move items out of unit.
- Once delivered, container remains in place until the demonstration is over and is picked up by the container company
- For individual treatment types, SCAG will share with interested partners once details are confirmed.

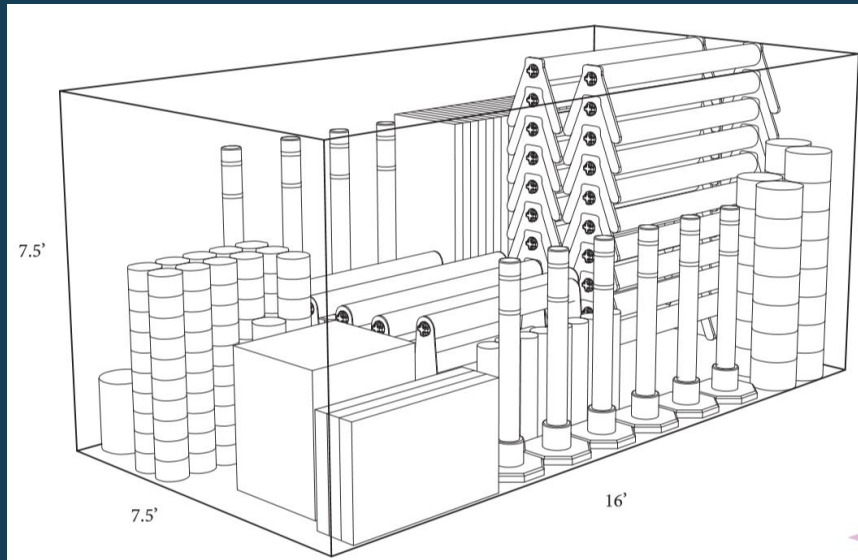

Set-up

- Demonstrations do not typically last longer than 1 single day due their temporary nature, as the Kit would require overnight supervision.
- Set-up typically requires 2 people and 2-4 hours, depending on how many treatments are installed.
- You can find the complete set-up instructions for the Kit in the Final Kit Guide.

Set up

First, mark off a 22 feet space where the parklet is to be located. Once a designated space has been chosen, begin by placing pedestals down in a grid that will support the planes.

Ensure the pedestals are set to a level that allows for a flat surface from plane to curb to sidewalk. Continue setting down pedestals and connecting planes on top of the pedestals.

Once the planes are set up, connect the small and large railing brackets down to the plane, using caps and screws. The caps should be placed under the planes, to connect the brackets and planes.

Finally, assemble the tables and place the tables, umbrellas, stools, and fake plants on the parklet.

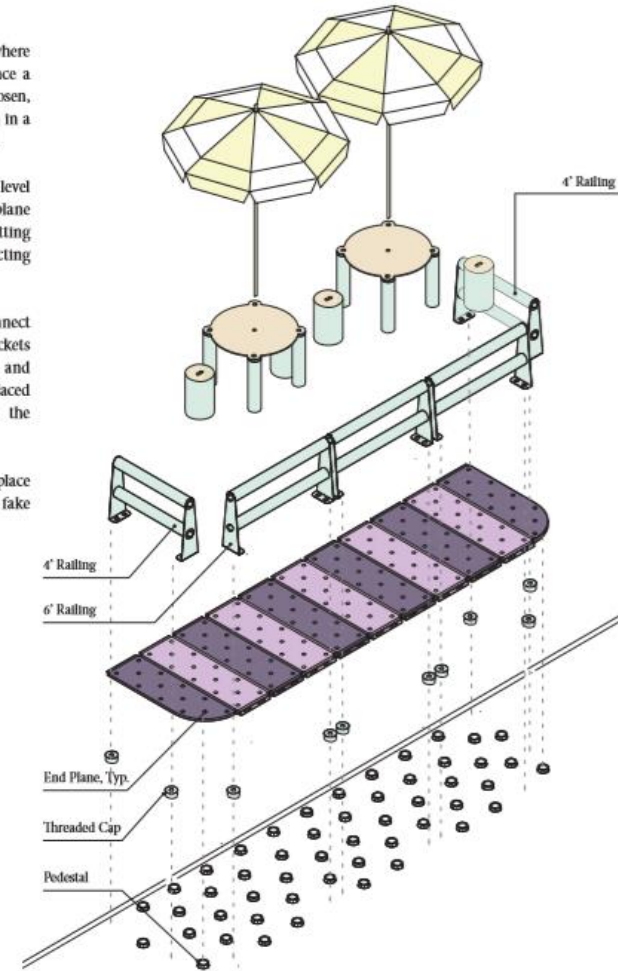


Fig. 07: Parklet Assembly Diagram